


Oil Free Bushings Copper Alloy Straight I.D.F7/O.D.m6



M Material: High Tensile Brass Alloy

Solid Lubricant Embedded

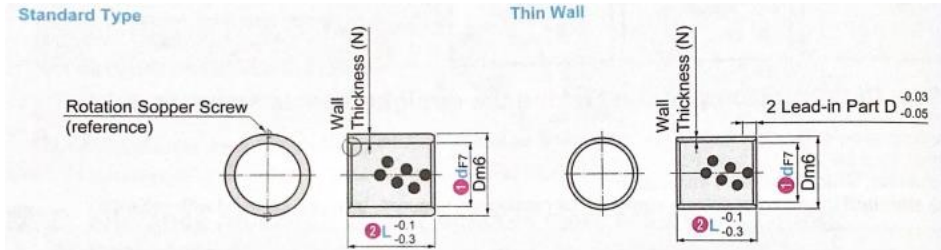

1 L.D. dF7	2 Overall Length L	Standaard Type			Thin Wall				
		Dm6 (*1)	Wall Thickness (N)	Rotation Sopper Screw (reference)	Dm6 (*1)	Wall Thickness (N)			
5	0.022	8	10 12 (15)	9	2	M4x8	7	1	
6	0.010	8 (9)	10 12 15 16 (20)				10		8
8	0.028	8	10 12 15 16 20 (25)				12		10
10	0.013	8	10 12 15 16 20 25 (30)				14		12
12	0.034 0.016	(8)	10 12 15 16 20 25 (30) (35)	18	3	M4x8	15	1.5	
13			10 12 15 16 20 25 (30) (35)	19			16		
15			10 12 15 16 20 25 30 (35) (40)	21			18		
16			10 12 15 16 (19) 20 25 30 (35) (40)	22			20		
18		(10) 12 15 16 (19) 20 25 30 (35) (40)	24	24	4	M5x8	22	2	
20	0.041 0.020	(10) (12) 15 16 20 25 30 (35) 40 (50) (60)	28	33			24		
25		(12) 15 16 20 25 30 (35) 40 (50) (60)	33				29		
30		(12) 15 16 20 25 30 (35) 40 (50) (60) (70)	38	4.5	M6x16	34	2.5		
35	0.050 0.025	20 25 30 (35) 40 (50) (60) (70)	44			40			
40		20 25 30 (35) 40 50 (60) (70) (80)	50			45			
50		30 (35) 40 50 (60) (70) (80)	62	55					
60	0.060	(50) (60) (70) (80)	75	7.5	M8x16	-	-		
80	0.030	(60) (70) (80)	96	8					
100	0.071 0.036	(80) (100)	120	10					